

CURRENT TRANSFORMERS FOR AMMETERS. (LOW VOLTAGE)



MFO-30



MFO-40




MFO-60




MFO-100

MOTD	MFO-30	MFO-40	MFO-60	MFO-100
RATIO	POWER CLASS	POWER CLASS	POWER CLASS	POWER CLASS
50/5A	2VA* 1A			
60/5A	2VA* 1A			
75/5A	2,5VA* 1A			
100/5A	2,5VA* 1A			
125/5A	2,5VA* 1A			
150/5A	3VA* 1A			
200/5A	5VA 1	3VA* 1A		
250/5A	5VA 1	3VA* 1A		
300/5A	5VA 1	5VA 1		
400/5A	5VA 1	5VA 1		
500/5A	5VA 1	5VA 1	7,5VA 1	
600/5A			7,5VA 1	
700/5A			7,5VA 1	
750/5A			7,5VA 1	
800/5A			7,5VA 1	
1000/5A			7,5VA 1	10VA 1
1200/5A			10VA 1	10VA 1
1500/5A			10VA 1	10VA 1
2000/5A				10VA 1
2500/5A				10VA 1
3000/5A				10VA 1




MFO-100

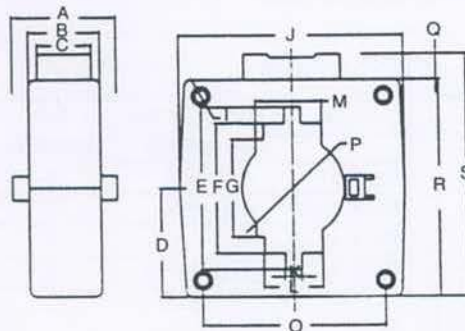

MFO-30~MFO-60

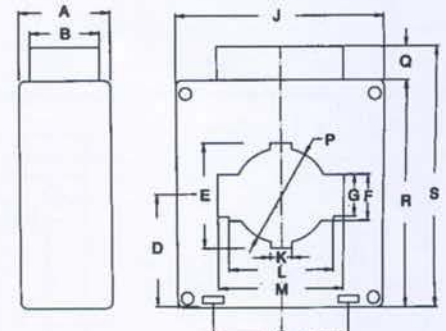

ITEM NO.	PRIMARY / SECONDARY (A)	WINDOW DIMENSION	PCOAD (VA)	ACCURACY CLASS	RATED VOLTAGE
MFO-30	30/5A-500/5A	30X10mm	2.5	1.0	600V
MFO-40	30/5A-500/5A	40X10mm	5	1.0	600V
MFO-60	400/5A-800/5A	60X20mm	10	1.0	600V
MFO-100	800/5A-3000/5A	100X10mm	15	1.0	600V

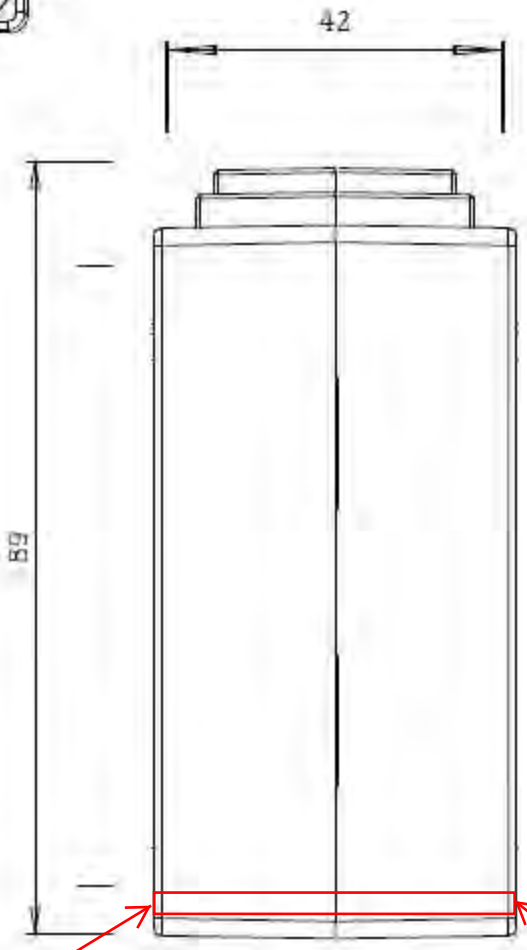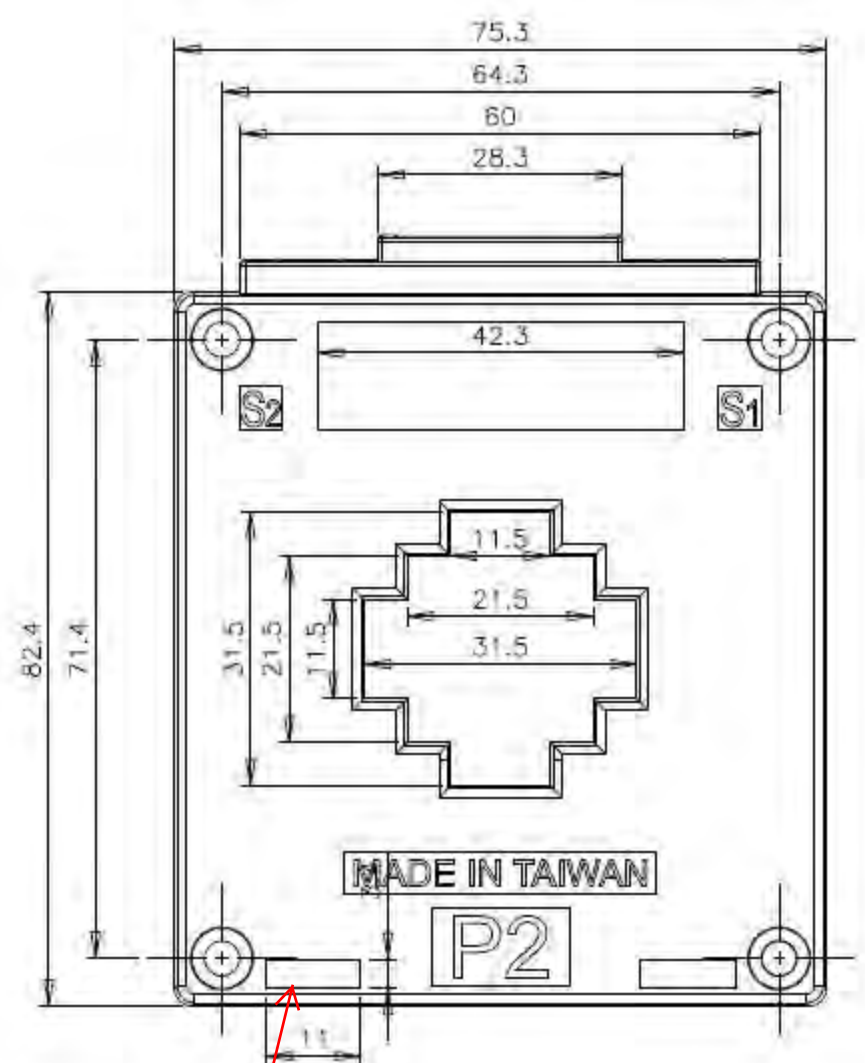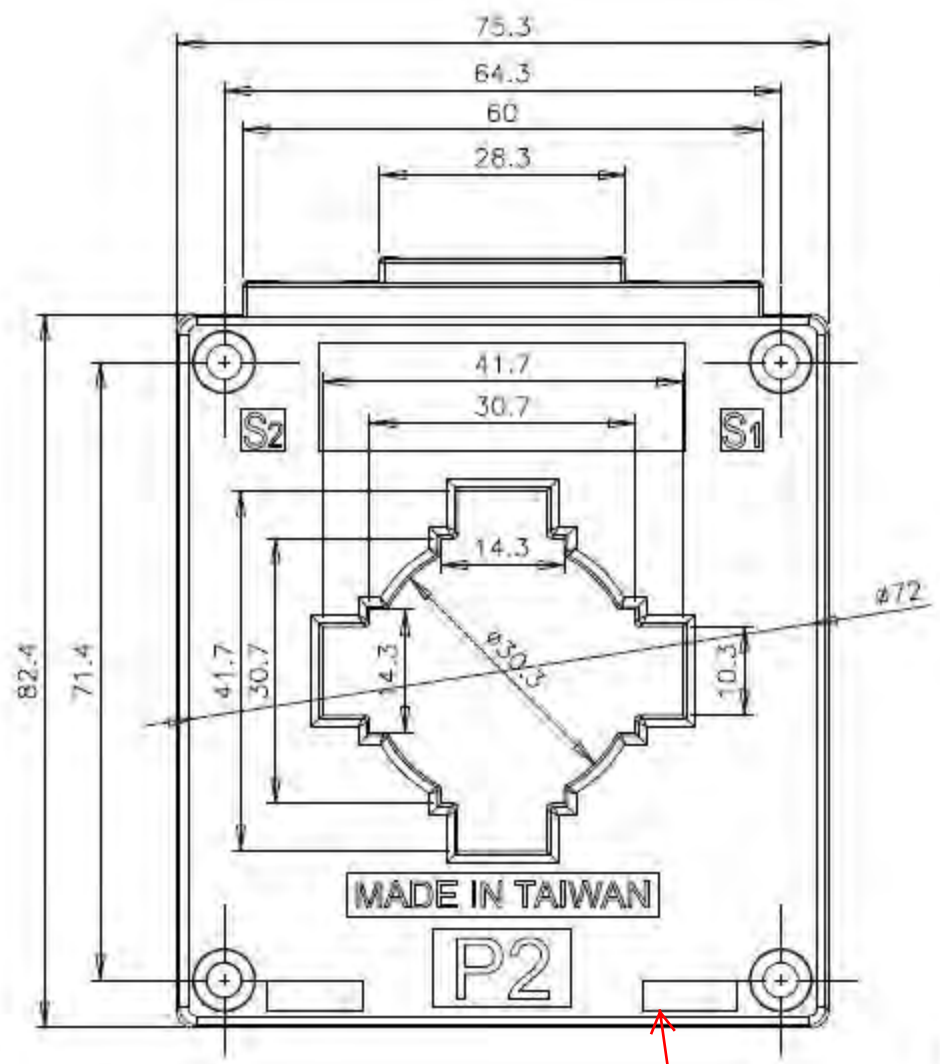

Note:
With fixing feet inserted here footprint becomes 75 x 75.3